


# DCA-220SPK POWER GENERATOR | 200KVA

## PRODUCT SPECIFICATIONS

DENYO

Alternator	
Frequency	50 Hz
Output Continuous/Standby	200 / 220 kVA
Rotating Speed	1,500 RPM
Number of phases	Three Phase 4 wire
Rated Voltage	380 / 440
Power Factor	0.8
Voltage Regulation %	+0.5
Excitation	Brushless, Rotating Exciter (with A.V.R.)
Insulation	Class F
Engine	
Make and Model	KOMATSU S6D125E-2-A
Type	Inlined, Direct injected, Turbocharged
Output Rating	242 / 1,500 PS/rpm 178 / 1,500 KW/min-1
Number of Cylinders - Bore X Stroke	6-125 x 150 mm
Piston Displacement	11.040 L
Fuel	Diesel
Fuel Consumption	31.5 L/H
Lube Oil Sump Cap	42 L
Coolant Capacity	36 L
Battery Capacity	145EG51RX2
Fuel Tank Capacity	380 L
Dimensions	
Length	3650 mm
Width	1300 mm
Height	1750 mm
Dry Weight	3670 kg

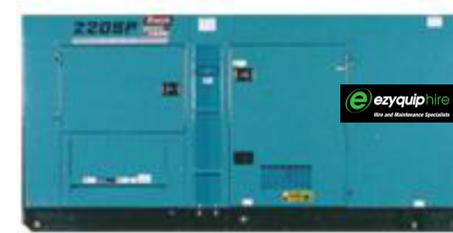

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.