


CA3500D | 12T

PRODUCT SPECIFICATIONS

DYNAPAC

Type	Smooth Drum
Masses	
Maximum Operating Mass	
Traction	
Speed Range (km/ h)	
Vertical Oscillation	
Tyre Size (8 ply)	
Theor. Gradeability	
Compaction	
Static Linear Load	
Nominal Amplitude (high/low)	
Vibration Frequency	
Centrifugal Force (high amplitude/ low amplitude)	
Engine	
Manufacturer	
Model	
Type	
Rated Power - SAE J1995	
Fuel Tank Capacity	
Fuel Burn	
Low	
Medium	
High	

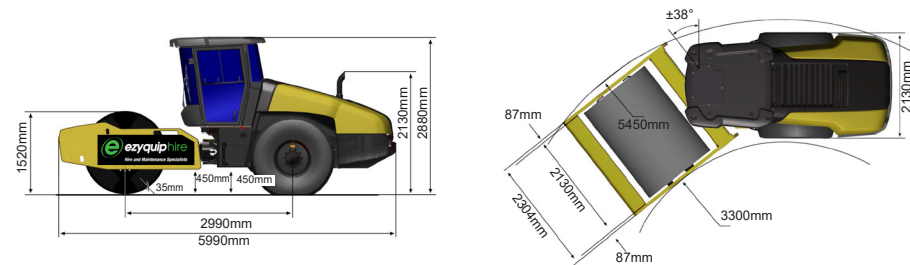

DISCLAIMER: This Product Specification Sheet was produced 01/20/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive; current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.