


CB34B UTILITY COMPACTOR | 4T

PRODUCT SPECIFICATIONS

CAT

Type	Combination Roller
Specifications	
Engine Model	CAT C2.2 Engine
Rated Power	36.4 kW (48.8 hp)
Maximum Weight	3,700 kg
Static Linear Load	36.3 kg/cm / 80 lb/in
Amplitude	2.5 mm
Centrifugal Force - High	140 kN
Max Travel Speed	12.9 km/h
Water Tank	306 L
Fuel Burn	
Low	1.5 – 2.5 L/hr
Medium	4 – 6 L/hr
High	6 – 8 L/hr

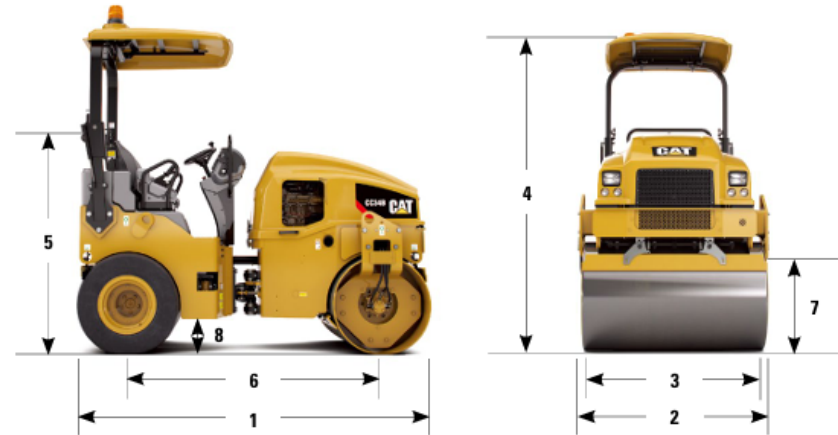

Dimensions

	CB34B
1 Overall length - mm (in)	2859 (113)
2 Overall width - mm (in)	1400 (55)
3 Drum width - mm (in)	1300 (51)
Drum offset - mm (in)	50 (2)
Drum shell thickness - mm (in)	16 (0.6)
Drum diameter - mm (in)	800 (32)
4 Height at ROPS/FOPS wo/canopy - mm (in)	2660 (105)
Height at ROPS/FOPS w/canopy - mm (in)	2765 (109)
5 Transport Height (w/foldable ROPS) - mm (in)	1930 (76)
6 Wheelbase - mm (in)	2050 mm (81)
7 Curb clearance - mm (in)	520 mm (20)
8 Ground clearance - mm (in)	284 mm (11)

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.



hire