
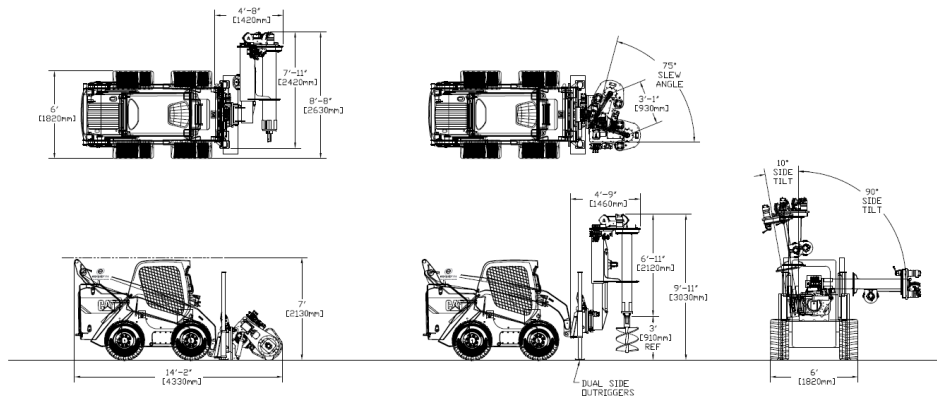


DRILL SERGEANT | 4.5T

PRODUCT SPECIFICATIONS

BAY SHORE

Specification	Units
TORQUE	8,000 FT (2.43KM)-LB LOW SPEED/4,000 FT (1.21KM)-LB HIGH SPEED @ 3,000 PSI
DRILL SPEED	35 RPM LOW SPEED/70 RPM HIGH SPEED @ 30 GPM
DRILLING DEPTH	25 FT (7.62M) (6 ELEMENT SQUARE KELLY BAR)
MAXIMUM AUGER SIZE	36 IN (900MM)
BASE MACHINE	4.5 TON (4.08 TONNE) MINIMUM/3,200 LB (1.45 TONNE) LIFT MINIMUM @ 50% OF TIPPING LOAD
CROWD STROKE	20 IN (508MM)
CROWD FORCE	3,500 LB (1.58 TONNE)
KELLY WINCH	4,500 LB (2.04 TONNE)
KELLY BARSET	6 ELEMENT SQUARE (3" INNER)
ATTACHMENT WEIGHT	3,100 LB (1.40 TONNE)
DRILL WEIGHT	12,200 LB (4.08 TONNE BASE)
TRANSPORT WEIGHT (WITH MACHINE)	9,580 KG (9.58 TONNE)

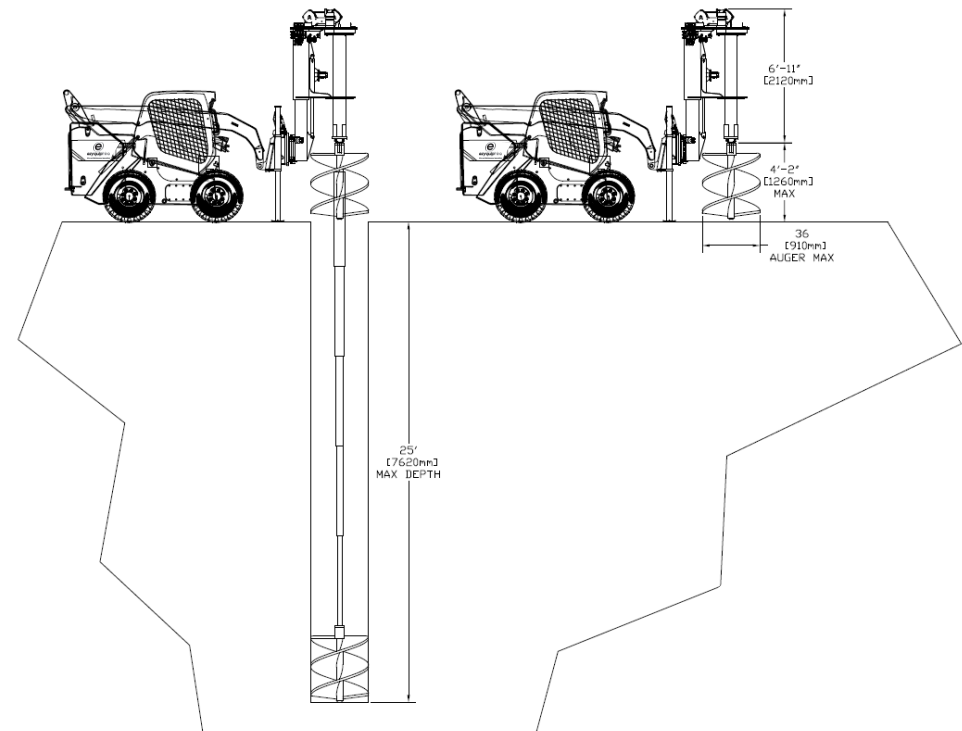

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources, and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.