


KX080-3 EXCAVATOR | 8T

PRODUCT SPECIFICATIONS

KUBOTA

Model	
Type of cabin	ROPS / FOPS cabin
Type of tracks	Rubber / Steel
Engine	
Model	Kubota V3307 DI-T
Output (SAEJ 1995 gross)	66.6 (49.7) / 2,000
Output (SAEJ 1349 gross)	63.9 (47.7) / 2,000
Displacement	3,331 cc
Dimensions	
Overall length	6,450 mm
Overall height	2,540 mm
Overall width	2,200 mm
Min. ground clearance	390 mm
Hydraulic system	
Pump capacity	72.0 Variable X 2 / 66.6 Gear X 1 L/min
Auxiliary hydraulic flow	100 / 66.6 L/min
Max. breakout force Bucket / Arm	6,650 / 3,880 kgf
Drive system	
Travel speed Low / High	2.7 / 4.9 km/h
Max. traction force Low speed	6,630 kgf
Tumbler distance	2,300 mm
Crawler length	2,900 mm
Shoe width Rubber / Steel	450 / 450 mm
Ground contact pressure Rubber / Steel	0.367 kgf/cm ²
Ground contact pressure Rubber / Steel	0.369 kgf/cm ²
Swing system	
Unit swing speed	9.5 rpm
Boom swing angle Left / Right	70 / 60 degree
Blade	
Dimensions Width	2,220 mm
Dimensions Height	500 mm
Max. lift above ground	500 mm
Max. drop below ground	500 mm
Hydraulic oil (Reservoir / System)	
Fuel reservoir	115 L
Operating weight (Including operator's weight @ 75 kgs)	
Rubber	8,280 kg
Steel	8,330 kg

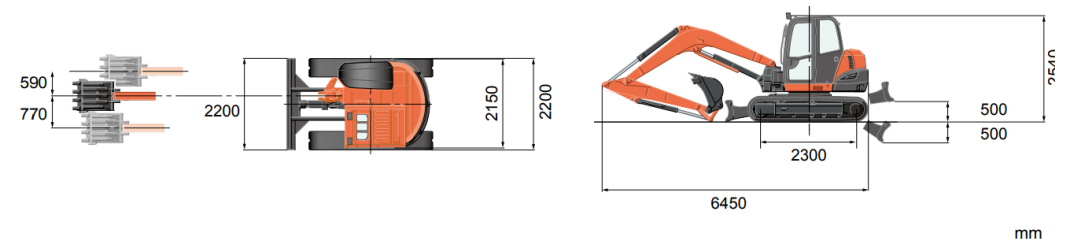

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.