

SK260LC-10 HIGH & WIDE EXCAVATOR | 25T


PRODUCT SPECIFICATIONS

KOBELCO

Performance	
Bucket Capacity (ISO heaped)	1.0-1.4 m³ / 1.31-1.83 m³
Swing Speed	11.0 rpm
Travel Speed (high/low)	5.6 / 3.4 km/h / 3.5 / 2.1 mph
Gradeability	70 (35) % (degree)
Bucket Digging Force	170 kN (187 kN PB) / 38,200 lbf (42,000 lbf PB)
Arm Crowding Force	122 kN (134 kN PB) / 27,400 lbf (30,100 lbf PB)
Drawbar Pulling Force	228 kN
Engine	
Model	Hino J05E-TH
Type	4-cyl, water-cooled, turbo-diesel
Power Output	(ISO 9249) 131 kW / 176 hp (ISO 14396) 137 kW / 184 hp
Max. Torque	(ISO 9249) 664 N·m / 490 lb-ft (ISO 14396) 680 N·m / 502 lb-ft
Displacement	5.123 L
Fuel Tank	403 L
Hydraulic System	
Pump	2 × axial piston + gear pump
Max. Discharge Flow	2 × 241 L/min 2 × 63.6 gal/min
Relief Valve Setting (main)/(Power Boost)	34.3 MPa / 37.3 MPa - 4,975 psi / 5,410 psi
Swing Motor	Axial piston motor
Travel Motors	2-speed axial piston
Hydraulic Oil Tank (system)	241 L / 63.6 gal

Arm length		Short 2.5 m	Standard 2.98 m	Long 3.66 m
A	Overall length	10,270	10,210	10,230
B	Overall height (to top of boom)	3,350	3,230	3,300
C	Overall width of crawler	SK250 2,990		SK260LC 3,190
D	Overall height (to top of cab)	SK250 3,190		SK260LC 3,090
E	Ground clearance of rear end*	SK250 1,090		SK260LC 440
F	Ground clearance*	SK250 440		SK260LC 3,100
G	Tail swing radius	SK250 3,100		SK260LC 3,070
G'	Distance from center of swing to rear end	SK250 3,470		SK260LC 3,850
H	Tumbler distance	SK250 4,260		SK260LC 4,640
I	Overall length of crawler	SK250 2,390		SK260LC 2,590
J	Track gauge	SK250 600		SK260LC 3,120
K	Shoe width	SK250 3,120		SK260LC 3,120
L	Overall width of upperstructure	SK250 3,120		SK260LC 3,120

*Without including height of shoe

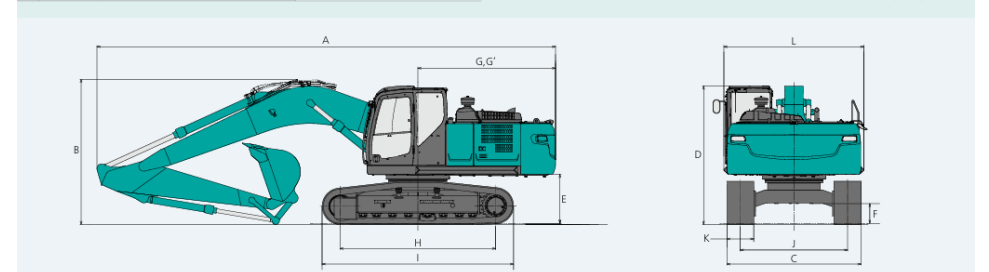

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.