


T590 COMPACT TRACK LOADER | 4T

PRODUCT SPECIFICATIONS

BOBCAT

Machine Rating	
Rated operating capacity (ISO 14397-1)	971 kg
Tipping load (ISO 14397-1)	2774 kg
Pump capacity	64.70 L/min
Pump capacity (with high flow option)	101.10 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (low range)	16.7 km/h
Engine	
Model	Bobcat / D24
Compliance	97/68 EC Stage IIIB
Fuel	Diesel
Cooling	Liquid
Power (SAE J1995) at 2600 RPM	49.2 kW
Torque at 1800 RPM (SAE J1995 Gross):	245.0 Nm
Number of cylinders	4
Displacement	2392 cm ³
Fuel tank	138.20 L
Weights	
Operating Weight	3,548 kg
Shipping Weight	3,187 kg
Controls	
Vehicle steering	Direction and speed controlled by two hand levers or optional joysticks
Loader hydraulics tilt and lift	Separate foot pedals, optional Advanced Control System (ACS) or Selectable Joystick Control (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever
Drive System	
Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
Standard Features	
Cushion suspension seat	Noise reduction kit
Cushioned lift cylinders	Work lights, front and rear
Automatically activated intake air heater	Parking brake
Auxiliary hydraulics: variable flow/maximum flow	Seat belt
Bob-Tach™ frame	Seat bar
Bobcat Interlock Control System (BICS)	12 x 16.5, 12-ply, Heavy duty tyres
Deluxe operator cab* Includes interior cab foam, side, top and rear windows, Deluxe wire harness, dome light, electrical power port, cup holder, storage place and horn	Turbo-charger with approved spark arrestor
Hydraulic bucket positioning (including ON/OFF switch)	Tracks — rubber — 320 mm
	CE certification
	Warranty: 12 months or 2000 hours (whichever occurs first)

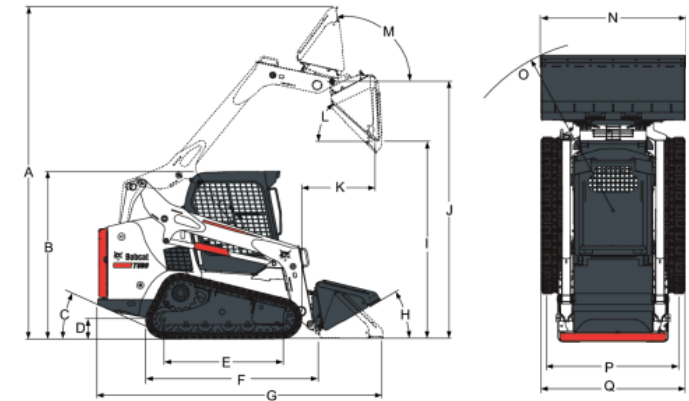

(A)	3901.0 mm	(J)	3023.0 mm
(B)	1972.0 mm	(K)	887.0 mm
(C)	28.8°	(L)	42.0°
(D)	240.0 mm	(M)	97.0°
(E)	1402.0 mm	(N)	1727.0 mm
(F)	2657.0 mm	(N*)	1880.0 mm
(G)	3378.0 mm	(O)	2032.0 mm
(H)	30.0°	(P)	1384.0 mm
(I)	2319.0 mm	(Q)	1704.0 mm

DISCLAIMER: This Product Specification Sheet was produced 01/2020. Every effort has been made to ensure that the content is accurate, however the contents are subject to change. Information contained in this Specification Sheet is: for general information only and does not purport to be comprehensive, current only at the time it is placed in this document compiled from manufacturer and industry sources; and not intended to provide nor make any recommendation upon which you should rely for any purpose whatsoever. Ezyquip Hire makes no warranty express or implied, including without limitation any warranty of merchantability or fitness for any particular purpose. Ezyquip Hire shall not be liable for any special, incidental, or consequential damages or loss of profits resulting from use of or misuse of the general information provided in this document.

ezyquiphire
Hire and Maintenance Specialists